



Topology Optimization of Electric Motor Using Topological Derivative for Nonlinear Magnetostatics

Peter Gangl

Institute of Computational Mathematics, Johannes Kepler University
Altenberger Str. 69, 4040 Linz, Austria

Samuel Amstutz

Département Mathématiques, Université d'Avignon
33 rue Louis Pasteur, 84000 Avignon, France

Ulrich Langer

Institute of Computational Mathematics, Johannes Kepler University
Altenberger Str. 69, 4040 Linz, Austria

NuMa-Report No. 2015-09

June 2015

Technical Reports before 1998:

1995

- 95-1 Hedwig Brandstetter
Was ist neu in Fortran 90? March 1995
- 95-2 G. Haase, B. Heise, M. Kuhn, U. Langer
Adaptive Domain Decomposition Methods for Finite and Boundary Element Equations. August 1995
- 95-3 Joachim Schöberl
An Automatic Mesh Generator Using Geometric Rules for Two and Three Space Dimensions. August 1995

1996

- 96-1 Ferdinand Kickingger
Automatic Mesh Generation for 3D Objects. February 1996
- 96-2 Mario Goppold, Gundolf Haase, Bodo Heise und Michael Kuhn
Preprocessing in BE/FE Domain Decomposition Methods. February 1996
- 96-3 Bodo Heise
A Mixed Variational Formulation for 3D Magnetostatics and its Finite Element Discretisation. February 1996
- 96-4 Bodo Heise und Michael Jung
Robust Parallel Newton-Multilevel Methods. February 1996
- 96-5 Ferdinand Kickingger
Algebraic Multigrid for Discrete Elliptic Second Order Problems. February 1996
- 96-6 Bodo Heise
A Mixed Variational Formulation for 3D Magnetostatics and its Finite Element Discretisation. May 1996
- 96-7 Michael Kuhn
Benchmarking for Boundary Element Methods. June 1996

1997

- 97-1 Bodo Heise, Michael Kuhn and Ulrich Langer
A Mixed Variational Formulation for 3D Magnetostatics in the Space $H(\text{rot}) \cap H(\text{div})$ February 1997
- 97-2 Joachim Schöberl
Robust Multigrid Preconditioning for Parameter Dependent Problems I: The Stokes-type Case. June 1997
- 97-3 Ferdinand Kickingger, Sergei V. Nepomnyaschikh, Ralf Pfau, Joachim Schöberl
Numerical Estimates of Inequalities in $H^{\frac{1}{2}}$. August 1997
- 97-4 Joachim Schöberl
Programmbeschreibung NAOMI 2D und Algebraic Multigrid. September 1997

From 1998 to 2008 technical reports were published by SFB013. Please see

<http://www.sfb013.uni-linz.ac.at/index.php?id=reports>

From 2004 on reports were also published by RICAM. Please see

<http://www.ricam.oeaw.ac.at/publications/list/>

For a complete list of NuMa reports see

<http://www.numa.uni-linz.ac.at/Publications/List/>

Topology Optimization of Electric Motor Using Topological Derivative for Nonlinear Magnetostatics

Peter Gangl¹, Samuel Amstutz², and Ulrich Langer³

¹Doctoral Program “Computational Mathematics”, Johannes Kepler University, Linz, Austria

²Département Mathématiques, Université d'Avignon, Avignon, France

³Institute of Computational Mathematics, Johannes Kepler University, Linz, Austria

We aim at finding an optimal design for an interior permanent magnet electric motor by means of a sensitivity-based topology optimization method. The gradient-based ON/OFF method, introduced by Y. Okamoto and N. Takahashi in 2005, has been successfully applied to optimization problems of this form. We show that this method can be improved by considering the mathematical concept of topological derivatives. Topological derivatives for optimization problems constrained by linear partial differential equations (PDEs) are well-understood, whereas little is known about topological derivatives in combination with nonlinear PDE constraints. We derive the topological derivative for an optimization problem constrained by the equation of nonlinear two-dimensional magnetostatics, illustrate its advantages over the sensitivities used in the ON/OFF method, and show numerical results for the optimization of an interior permanent magnet electric motor obtained by a level-set algorithm.

Index Terms—design optimization, permanent magnet motors, rotating machines, sensitivity analysis

I. INTRODUCTION

TOPOLOGY OPTIMIZATION methods originate from mechanical engineering [1], but have found more and more applications in electromagnetics in recent years. They aim at finding designs which are optimal with respect to some criteria. More precisely, they seek for the distribution of material in a design subdomain that minimizes a given design-dependent objective functional J . In contrast to shape optimization methods, where only the boundary or interface of a structure can be modified, topology optimization methods also allow for a nucleation of holes and thus for a change of the topology of the initial design. Therefore, they are much more flexible and often yield better results than shape optimization methods.

A useful tool for topology optimization are topological sensitivities. At each point of the design subdomain, they indicate whether a local change of the material would increase or decrease the objective functional. The ON/OFF method, was introduced in [2] and adopted to a sensitivity-based method in [3], which uses information about the sensitivity of the cost functional with respect to a local perturbation of the magnetic reluctivity to improve the design of a given device. It was successfully applied to the optimization of various electromagnetic devices [4-7]. The mathematical concept of topological derivatives is based on the idea of [8] and was introduced in a mathematically rigorous way in [9]. It was shown in [10] that, in the case of a linear state equation, the sensitivity used in the ON/OFF method is equivalent to the topological derivative. For the optimization of electrical machines, we are faced with a nonlinear state equation. In this case, the application of the ON/OFF method generalizes directly, whereas the formula for the topological derivative has been an open problem.

In this work, we compare the ideas of the ON/OFF method and the topological derivative and show that the sensitivity used in the ON/OFF method is not the right quantity to be considered for topology optimization. We present the formula

for the topological derivative in the case of nonlinear material behavior and show numerical results for a model problem that were obtained by application of a level-set algorithm [11].

II. PROBLEM DESCRIPTION

We consider an interior permanent magnet (IPM) brushless electric motor as depicted in Fig. 1 that consists of ferromagnetic material, permanent magnets, coil areas and air regions. For our special application we do not consider any electric current induced in the coils. Our goal is to find a design that yields a small total harmonic distortion (THD) of the radial component of the magnetic flux density in the air gap, while retaining a large amplitude of its first harmonic. We search for the distribution of ferromagnetic material in the design regions of the rotor (striped areas in Fig. 1) that minimizes the ratio between the THD and this amplitude. The optimization problem looks as follows:

$$J(u(\Omega)) = \frac{\text{THD}(\mathbf{B}_r(u(\Omega)))}{A_1(\mathbf{B}_r(u(\Omega)))} \rightarrow \min \quad (1)$$

$$\text{s.t.} \begin{cases} -\text{div}(\nu(|\nabla u|) \nabla u - \mathbf{M}^\perp) = 0 & \text{in } \Omega \\ u = 0 & \text{on } \partial\Omega \end{cases} \quad (2)$$

Here, we consider the setting of two-dimensional magnetostatics where the magnetic flux density is only acting in the x_1 - x_2 plane, i.e., $\mathbf{B} = (B_1, B_2, 0)^T$, and $\Omega \subset \mathbb{R}^2$ is a bounded Lipschitz domain as depicted in Fig. 1. The state variable $u = u(x_1, x_2)$ denotes the third component of the magnetic vector potential, i.e., $\mathbf{B}(u) = \text{curl}((0, 0, u)^T)$, and \mathbf{B}_r the radial component of \mathbf{B} in the air gap. Note that the magnetic vector potential $(0, 0, u)^T$ satisfies the Coulomb gauge condition. Further, $\mathbf{M}^\perp = (-M_2, M_1)^T$ denotes the perpendicular of the permanent magnetization which vanishes outside the permanent magnets, and ν represents the magnetic reluctivity, which is a nonlinear function $\hat{\nu}$ in the ferromagnetic subdomain Ω_f (brown area in Fig. 1) and the

constant ν_0 (magnetic reluctivity of air) else, i.e.,

$$\nu(|\nabla u|) = \begin{cases} \hat{\nu}(|\nabla u|) & x \in \Omega_f, \\ \nu_0 & x \in \Omega_{air}. \end{cases} \quad (3)$$

We will later refer to a simplified linear setting where the nonlinear function $\hat{\nu}$ is replaced by some constant ν_1 . Note that J depends on Ω_f via the solution u of the state equation (2). The THD of \mathbf{B}_r is defined via the Fourier coefficients,

$$\mathbf{B}_r = \sum_{k=1}^{\infty} A_k \cos(\omega k x), \quad \text{THD}(\mathbf{B}_r) = \sqrt{\frac{\left(\sum_{k=2}^N A_k^2\right)}{\left(\sum_{k=1}^N A_k^2\right)}},$$

and here serves as a measure of the smoothness of the rotation of the rotor.

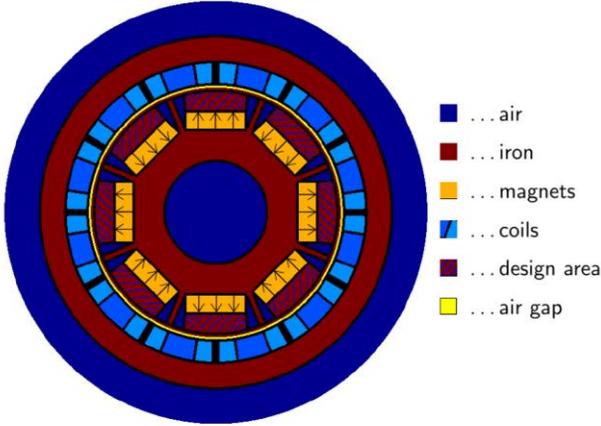


Fig. 1. Computational domain Ω representing electric motor with different subdomains

III. ON/OFF METHOD

The sensitivity-based ON/OFF method as introduced in [3] is based on the fact that the difference between having iron or air in a spatial point is only reflected in the value of the magnetic reluctivity ν which is a constant ν_0 in the air subdomain and a nonlinear function $\hat{\nu}$ in the ferromagnetic material. This nonlinear function $\hat{\nu}$ usually attains values that are much smaller than ν_0 . The idea is to compute the sensitivity of the objective function with respect to a local perturbation of the magnetic reluctivity in one element of the finite element (FE) mesh, i.e.,

$$\frac{dJ}{d\nu_k},$$

where ν_k is the magnetic reluctivity in element T_k . Whenever this sensitivity is negative, assuming monotonicity of J with respect to ν_k , a larger value for ν_k would yield a smaller value for J , which is realized by switching the element OFF, i.e., by setting it to air. On the other hand, if the sensitivity is positive, switching the element ON, i.e., setting it to iron, would be favorable for reducing the cost functional J . We remark that this sensitivity has an intrinsic dependence on the size of the

elements in the FE mesh which can be avoided by scaling the sensitivities by the element size. For piecewise linear FE calculations, the resulting sensitivities read

$$S_k := \frac{1}{|T_k|} \frac{dJ}{d\nu_k} = U_0^T V_0 \quad (4)$$

where $U_0 = \nabla u$ and $V_0 = \nabla v$ restricted to the element T_k . Here, v is the solution to the adjoint equation of problem (1)-(2). Note that formula (4) is the same for the linear and the nonlinear case, the only difference lies in the definition of the adjoint state v . For the definition of the adjoint equation, we refer the reader to [10].

This method has, amongst other applications, been successfully applied to the optimization of electromagnetic shielding [4], [5] and electric motors [6]. However, it is based on heuristics for the following reason: The sensitivity S_k just gives information about the behavior of J for a small variation of the magnetic reluctivity. When changing the material, the reluctivity is switched from $\hat{\nu}$ directly to ν_0 (or vice versa). The correct quantity to be considered for this scenario is the topological derivative.

IV. TOPOLOGICAL DERIVATIVE

A. Definition

The concept of the topological derivative (TD) came up as the bubble method in [8] and was introduced in a mathematically rigorous way in [9]. The topological derivative of a domain-dependent functional $J = J(\Omega)$ at a point x_0 describes its sensitivity with respect to a perturbation of the domain in a neighborhood of that point. It is defined as the quantity $G(x_0)$ satisfying a topological asymptotic expansion of the form

$$J(\Omega_\varepsilon) - J(\Omega) = \varepsilon^d G(x_0) + o(\varepsilon^d) \quad \text{as } \varepsilon \rightarrow 0. \quad (5)$$

Here, Ω_ε denotes the perturbed configuration where the material property in a small neighborhood $\omega_\varepsilon = x_0 + \varepsilon D$ (with D , e.g., the unit disk) of the spatial point x_0 is switched from iron to air or vice versa, and d is the space dimension (here: $d = 2$). Note that, when $G(x_0)$ is negative for a point x_0 , this definition yields that, for ε small enough, switching the material in ω_ε decreases the objective functional.

B. Formulas

We want to emphasize that we get two different formulas for the topological derivative depending on whether we are interested in the sensitivity for a local transition from ferromagnetic material to air or vice versa. We will denote them by $G^{f \rightarrow air}$ and $G^{air \rightarrow f}$, respectively. Let v the adjoint state of optimization problem (1)-(2). Furthermore, let $U_0 = \nabla u(x_0)$ and $V_0 = \nabla v(x_0)$.

1) Linear case

It was shown in [10] that in the simplified linear setting, where the nonlinear function \hat{v} in (2) is replaced by a constant v_1 , the formulas for the topological derivative for introducing air in iron of optimization problem (1)-(2) reads

$$G^{f \rightarrow \text{air}}(x_0) = C^{f \rightarrow \text{air}} U_0^T V_0 \quad (6)$$

with $C^{f \rightarrow \text{air}} = 2\pi(v_0 - v_1)/(v_0 + v_1)$. The formula for $G^{\text{air} \rightarrow f}$ can be obtained by switching the roles of v_0 and v_1 . We get

$$G^{\text{air} \rightarrow f}(x_0) = C^{\text{air} \rightarrow f} U_0^T V_0, \quad (7)$$

with $C^{\text{air} \rightarrow f} = -(v_0/v_1) C^{f \rightarrow \text{air}}$.

2) Nonlinear case

In the nonlinear case, the topological derivative of optimization problem (1)-(2) is a sum of two terms. The derivation of this lengthy formula is similar to [12]. In both cases, the TD has the form

$$G(x_0) = U_0^T P(U_0) V_0 + \int S_{U_0}(\nabla H)(V_0 + \nabla K)$$

where $P(U_0)$ denotes a polarization matrix, H is the variation of the direct state and K the variation of the adjoint state, both after a change of scale. The functions H and K are solutions to a nonlinear and a linear partial differential equation (PDE) on the entire plane \mathbb{R}^2 . The difference between $G^{f \rightarrow \text{air}}$ and $G^{\text{air} \rightarrow f}$ lies in the definitions of S_{U_0} , H , K as well as of the polarization matrix $P(U_0)$. The polarization matrices for the two cases read

$$P^{f \rightarrow \text{air}}(U_0) = C_1 R_\varphi \begin{pmatrix} \frac{1}{1+v_0 e/(\alpha+\beta)} & 0 \\ 0 & \frac{1}{e+\Gamma} \end{pmatrix} R_\varphi^T,$$

$$P^{\text{air} \rightarrow f}(U_0) = C_2 R_\varphi \begin{pmatrix} \frac{r-1}{(r+1)(r-1-\beta/\alpha)} & 0 \\ 0 & \frac{1}{r+1} \end{pmatrix} R_\varphi^T,$$

where $C_1 = (v_0 - \alpha)\pi(1 + e)$, $C_2 = 2r(\alpha - v_0)\pi$, $r = v_0/\alpha$, $e = \alpha/(\alpha + \beta)$, $\alpha = \hat{v}(|U_0|)$, $\beta = \hat{v}'(|U_0|)$, φ the angle between U_0 and the x-axis and R_φ the rotation matrix around angle φ .

V. COMPARISON

Comparing formulas (4) and (6) for the linear case, we see that they only differ by a constant factor $C^{f \rightarrow \text{air}}$. When one is only interested in removing material, this factor is of no importance. However, when one wants to design a bidirectional optimization method that can decide whether it is better to remove material at one place or to add material at another, the information contained in these constants $C^{f \rightarrow \text{air}}$ and $C^{\text{air} \rightarrow f}$ is crucial.

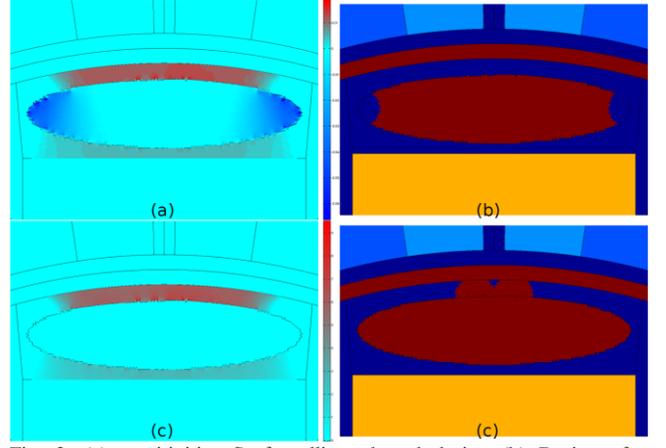


Fig. 2. (a) sensitivities S_k for ellipse-shaped design (b) Design after removing material according to sensitivities S_k , $J(u) = 0.436$ (c) generalized topological derivative for ellipse-shaped design (d) design after adding material according to topological derivative, $J(u) = 0.406$

In the nonlinear case, we observe that the topological derivative differs from the scaled version of the ON/OFF sensitivities, S_k , in two ways: on the one hand, in the polarization matrices $P^{f \rightarrow \text{air}}(U_0)$ and $P^{\text{air} \rightarrow f}(U_0)$, which play the same role as the constants $C^{f \rightarrow \text{air}}$ and $C^{\text{air} \rightarrow f}$ in the linear case, but now depend on the gradient of the solution u at point x_0 ; on the other hand, in the presence of a new second term which accounts for the nonlinearity of the problem. Numerical experiments showed that, in regions of low flux density, the second term in (8) is negligible in comparison with the first term. Therefore, we will neglect this term for the rest of this work. In Fig. 2, we illustrate the importance of the polarization matrices $P^{f \rightarrow \text{air}}(U_0)$ and $P^{\text{air} \rightarrow f}(U_0)$. For a hypothetical ellipse-shaped design, the sensitivities S_k suggest to remove material on the left and right ends of the ellipse, whereas the TD suggests to add material at the top. Fig. 2 gives numerical evidence that the latter yields a much larger decrease of the objective functional. This phenomenon might lead to final designs obtained by the ON/OFF method that are not optimal because the wrong sensitivities have been used.

The conceptual difference between the two kinds of sensitivities is the following: The sensitivity S_k represents the sensitivity with respect to a small perturbation of the material property. This information is important, for instance, when one is interested in the sensitivity of a design with respect to manufacturing errors (see, e.g., [13]). The TD is the sensitivity with respect to a change of material from \hat{v} directly to v_0 in a small neighborhood of a point x_0 and is therefore the right sensitivity for topology optimization.

VI. NUMERICAL RESULTS

Knowing both sensitivities $G^{f \rightarrow \text{air}}$ and $G^{\text{air} \rightarrow f}$ allows us to apply the level set algorithm introduced in [11]. Unlike most level set methods, this algorithm is based on topological sensitivity information rather than on shape sensitivities.

We represent a design by means of a level set function ψ in the following way: Wherever ψ is positive, we have ferromagnetic material, and wherever it attains negative values, we have air, i.e.,

$$\begin{aligned}\psi(x) > 0 &\Leftrightarrow x \in \Omega_f, \\ \psi(x) < 0 &\Leftrightarrow x \in \Omega_{air}.\end{aligned}$$

By this definition, the interface between Ω_f and Ω_{air} is given by the zero level set of the function ψ . The algorithm is based on the following observation: Defining the generalized topological derivative,

$$\tilde{G}(x) = \begin{cases} G^{f \rightarrow air}(x) & x \in \Omega_f, \\ -G^{air \rightarrow f}(x) & x \in \Omega_{air}, \end{cases}$$

the condition $\psi = \tilde{G}_\psi$ is a sufficient optimality condition. Here, \tilde{G}_ψ denotes the generalized topological derivative for the design represented by the level set function ψ . The optimality can be seen as follows: For a point x_0 in Ω_f , we have that $0 < \psi(x_0) = \tilde{G}_\psi(x_0) = G^{f \rightarrow air}(x_0)$. Thus, introducing air at point x_0 would not decrease the objective function. An analogous argument holds for a point x_0 in Ω_{air} . In each iteration of the algorithm, the next design is chosen as a combination of the current design and the generalized topological derivative in such a way, that a decrease of the objective function is achieved. The algorithm is the following:

1) Initialization: Choose ψ_0 with $\|\psi_0\| = 1$, compute \tilde{G}_{ψ_0} and set $k = 0$

2) set the angle $\theta_k = \arccos(\psi_k, \|\tilde{G}_{\psi_k}\|^{-1} \tilde{G}_{\psi_k})$ and update

$$\begin{aligned}\psi_{k+1} &= \frac{1}{\sin \theta_k} [\sin((1 - \kappa_k)\theta_k)\psi_k \\ &\quad + \sin(\kappa_k \theta_k) \|\tilde{G}_{\psi_k}\|^{-1} \tilde{G}_{\psi_k}] \end{aligned}$$

where $\kappa_k = \max\{1, 1/2, 1/4, \dots\}$ such that $J(\psi_{k+1}) < J(\psi_k)$

3) Compute $\tilde{G}_{\psi_{k+1}}$

4) If $\tilde{G}_{\psi_{k+1}} = \psi_{k+1}$ then stop, else $k \leftarrow k + 1$ and go to 2)

For details on the algorithm and a mathematical analysis, we refer the reader to [11] and [14]. We applied the algorithm to the optimization of the electric motor described in Section II. The initial and final design are depicted in Fig. 3. The objective functional J was reduced by 92%, from $J_{init} = 0.4550$ to $J_{final} = 0.0362$. The THD was decreased from 0.1350 to 0.0111 and the amplitude A_1 of the first harmonic was increased from 0.2968 to 0.3067. We want to emphasize that this algorithm is very robust with respect to the choice of the initial design and can achieve large topological changes.

ACKNOWLEDGMENT

Peter Gangl and Ulrich Langer gratefully acknowledge the Austrian Science Fund (FWF) for the financial support of their work via the Doctoral Program DK W1214 (project DK4) on Computational Mathematics. They also thank the Linz Center of Mechatronics (LCM), which is a part of the COMET K2 program of the Austrian Government, for supporting their work on topology and shape optimization of electrical machines.

REFERENCES

- [1] M. P. Bendsøe, *Optimization of structural topology, shape, and material*, Springer Berlin Heidelberg, 1995
- [2] C.-H. Im, H.-K. Jung, and Y.-J. Kim, "Hybrid genetic algorithm for electromagnetic topology optimization," *IEEE Trans. Magn.*, vol. 39, no. 5, pp. 2163--2169, 2003.
- [3] Y. Okamoto, and N. Takahashi, "A novel topology optimization of nonlinear magnetic circuit using ON/OFF method", *IEEJ Trans. Fund. Mat.*, vol.125, no. 6, pp. 549--553, 2005
- [4] Y. Okamoto, M. Ohtake, and N. Takahashi, "Magnetic shield design of perpendicular magnetic recording head by using topology optimization technique," *IEEE Trans. Magn.*, vol. 41, no. 5, pp. 1788--1791, 2005.
- [5] N. Takahashi, S. Nakazaki, and D. Miyagi, "Optimization of electromagnetic and magnetic shielding using ON/OFF method," *IEEE Trans. Magn.*, vol. 46, no. 8, pp. 3153--3156, 2010.
- [6] N. Takahashi, T. Yamada, S. Shimose, and D. Miyagi, "Optimization of rotor of actual IPM motor using ON/OFF method," *IEEE Trans. Magn.*, vol. 47, no. 5, pp. 1262--1265, 2011.
- [7] Y. Okamoto, K. Akiyama, and N. Takahashi, "3-D topology optimization of single-pole-type head by using sensitivity analysis," *IEEE Trans. Magn.*, vol. 42, no. 4, pp. 1087--1090.
- [8] H.A. Eschenauer, V.V. Koblelev, A. Schumacher, "Bubble method for topology and shape optimization of structures," *Struct. Opt.*, vol. 8, no. 1, pp. 42--51, 1994.
- [9] J. Sokolowski and A. Zochowski, "On the topological derivative in shape optimization," *SIAM J. Control Optim.*, vol. 37, no. 4, pp. 1251--1272, 1999.
- [10] P. Gangl and U. Langer, "Topology optimization of electric machines based on topological sensitivity analysis," *Comput. Vis. Sci.*, vol. 15, no. 6, pp.345--354, 2012.
- [11] S. Amstutz and H. André, "A new algorithm for topology optimization using a level-set method," *J. Comp. Phys.*, vol. 216, no. 2, pp.573--578, 2006.
- [12] S. Amstutz, and A. Bonnafé, "Topological asymptotic analysis for a class of quasilinear elliptic equations," submitted for publication.
- [13] G. Bramerdorfer, P. Gangl, A. Föhler, U. Langer, W. Amrhein, "Determination of the cogging torque sensitivity of brushless permanent magnet machines due to changes of the material characteristics of ferromagnetic components," *7th IET International Conference on Power Electronics, Machines and Drives (PEMD 2014)*, 2014.
- [14] S. Amstutz, "Analysis of a level set method for topology optimization," *Optim. Methods Softw.*, vol. 26, no. 4-5, pp. 555--573, 2011

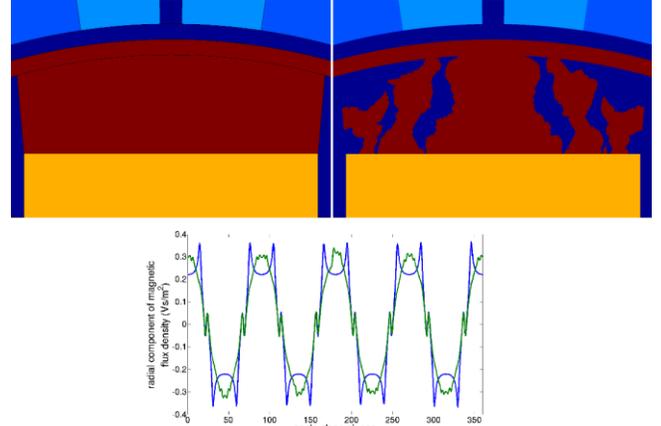


Fig. 3. Results obtained by application of level set algorithm: initial design (top left), final design (top right). Bottom: radial component of magnetic flux density along air gap for initial design (blue curve) and final design (green curve).

Latest Reports in this series

2009 - 2013

[..]

2014

[..]

- | | | |
|---------|---|----------------|
| 2014-06 | Wolfgang Krendl and Walter Zulehner
<i>A Decomposition Result for Biharmonic Problems and the Hellan-Herrmann-Johnson Method</i> | July 2014 |
| 2014-07 | Martin Jakob Gander and Martin Neumüller
<i>Analysis of a Time Multigrid Algorithm for DG-Discretizations in Time</i> | September 2014 |
| 2014-08 | Martin Jakob Gander and Martin Neumüller
<i>Analysis of a New Space-Time Parallel Multigrid Algorithm for Parabolic Problems</i> | November 2014 |
| 2014-09 | Helmut Gfrerer and Jiří V. Outrata
<i>On Computation of Limiting Coderivatives of the Normal-Cone Mapping to Inequality Systems and their Applications</i> | December 2014 |
| 2014-10 | Clemens Hofreither and Walter Zulehner
<i>Spectral Analysis of Geometric Multigrid Methods for Isogeometric Analysis</i> | December 2014 |
| 2014-11 | Clemens Hofreither and Walter Zulehner
<i>Mass Smoothers in Geometric Multigrid for Isogeometric Analysis</i> | December 2014 |

2015

- | | | |
|---------|--|---------------|
| 2015-01 | Peter Gangl, Ulrich Langer, Antoine Laurain, Houcine Meftahi and Kevin Sturm
<i>Shape Optimization of an Electric Motor Subject to Nonlinear Magnetostatics</i> | January 2015 |
| 2015-02 | Stefan Takacs and Thomas Takacs
<i>Approximation Error Estimates and Inverse Inequalities for B-Splines of Maximum Smoothness</i> | February 2015 |
| 2015-03 | Clemens Hofreither, Ulrich Langer and Steffen Weißer
<i>Convection-adapted BEM-based FEM</i> | February 2015 |
| 2015-04 | Helmut Gfrerer and Boris S. Mordukhovich
<i>Complete Characterizations of Tilt Stability in Nonlinear Programming under Weakest Qualification Conditions</i> | March 2015 |
| 2015-05 | Matúš Benko and Helmut Gfrerer
<i>An SQP Method for Mathematical Programs with Complementarity Constraints with Strong Convergence Properties</i> | May 2015 |
| 2015-06 | Irina Georgieva and Clemens Hofreither
<i>An Algorithm for Low-rank Approximation of Bivariate Functions Using Splines</i> | May 2015 |
| 2015-07 | Elias Karabelas and Martin Neumüller
<i>Generating Admissible Space-Time Meshes for Moving Domains in $d + 1$-Dimensions</i> | May 2015 |
| 2015-08 | Clemens Hofreither, Bert Jüttler, Gabor Kiss and Walter Zulehner
<i>Multigrid Methods for Isogeometric Analysis with THB-Splines</i> | June 2015 |
| 2015-09 | Peter Gangl, Samuel Amstutz and Ulrich Langer
<i>Topology Optimization of Electric Motor Using Topological Derivative for Nonlinear Magnetostatics</i> | June 2015 |

From 1998 to 2008 reports were published by SFB013. Please see

<http://www.sfb013.uni-linz.ac.at/index.php?id=reports>

From 2004 on reports were also published by RICAM. Please see

<http://www.ricam.oeaw.ac.at/publications/list/>

For a complete list of NuMa reports see

<http://www.numa.uni-linz.ac.at/Publications/List/>